

Titan Arm

2-Way / 4-Way

Type	Wall mounted
Mounting	Wall Mounted
Material	Aluminium
Adjustability	Cardanic/Gimble
El. class / IP	Class II / IP20

Bridgelux Vero 10 LED


LED Modules included

Driver(s) included

CCT	2700K / 3000K / 4000K
CRI	Ra80 / Ra90
Luminous flux	2700K - Ra90: 836lm (92lm/W) 3000K - Ra90: 867m (95lm/W) 4000K on request

Beam angle	28° / 40°
Power	9.1W
Cooling	Passive (no fan)
SDCM	3
5 Year Bridgelux Warranty ⁽¹⁾	

⁽¹⁾ Limited warranty. More information on p.268

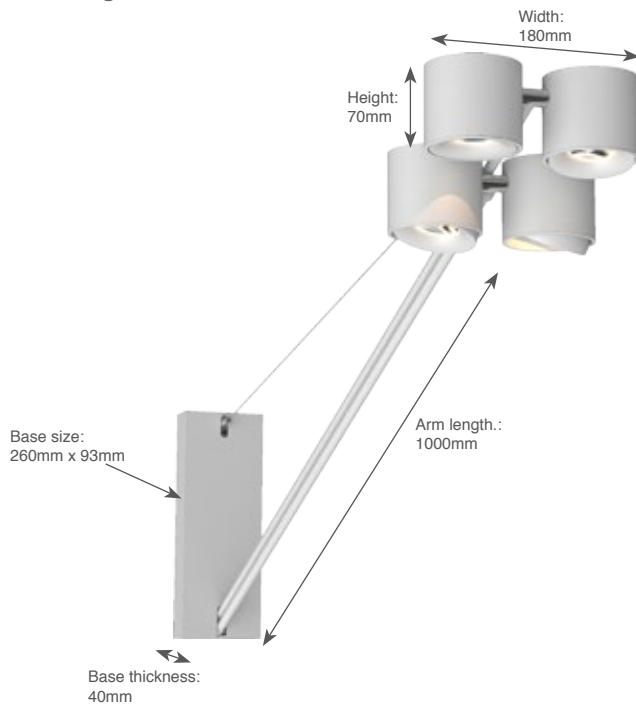

On Request

4000K
CRI Ra97



Titan Arm 2-way

Cone

2x Bridgelux LED (350mA) - non dimmable

(2x) 2700K - Ra90 - 9.1W - 836lm 1306.AA.24.927.01

(2x) 3000K - Ra90 - 9.1W - 867lm 1306.AA.24.930.01



Titan Arm 4-way

Cone

4x Bridgelux LED (350mA) - non dimmable

(4x) 2700K - Ra90 - 9.1W - 836lm 1309.AA.24.927.01

(4x) 3000K - Ra90 - 9.1W - 867lm 1309.AA.24.930.01

4x Bridgelux LED (350mA) - 1-10V dimmable

(4x) 2700K - Ra90 - 9.1W - 836lm 1309.AA.25.927.01

(4x) 3000K - Ra90 - 9.1W - 867lm 1309.AA.25.930.01

4x Bridgelux LED (350mA) - DALI dimmable

(4x) 2700K - Ra90 - 9.1W - 836lm 1309.AA.26.927.01

(4x) 3000K - Ra90 - 9.1W - 867lm 1309.AA.26.930.01

4x Bridgelux LED (350mA) - Push dimmable

(4x) 2700K - Ra90 - 9.1W - 836lm 1309.AA.29.927.01

(4x) 3000K - Ra90 - 9.1W - 867lm 1309.AA.29.930.01

28° Reflector: 0000.28.00.000.00

40° Reflector: 0000.40.00.000.00

Available colors: 0000.00.00.000.xx

01: Matt White Texture

color